

## TR341 Series Industrial Cellular Routers



### Introduction

TR341 Series Router is a type of industrial 802.11/b/g/n cellular router, which adopts high-powered industrial 32-bits CPU, with multi-layer software detection and hardware protection mechanism to ensure reliability and stability of the device. It supports worldwide carrier 4G/3G/2G cellular network FDD-LTE, TDD-LTE, and WCDMA, EVDO, TD-SCDMA, EDGE, CDMA 1X and GPRS. With rich VPN protocols (IPSEC, PPTP, L2TP, GRE and OpenVPN) to ensure the security of data transmission, and rich interfaces, such as Dual SIM(Optional), RS232, RS485(Optional), Ethernet Ports, I/O (Option), GPS(Optional) and WIFI. TR341 Series Router can help users to quickly access the Internet, to ensure secure and reliable data transmission. It's ideal for IOT (Internet of Things) and M2M (Machine to Machine) applications, and has been

widely used in many applications, such as Intelligent Transportation, Smart Grid, Oil and Gas, ATM, Vending Machine, Agricultural Irrigation, Environmental Protection, Industrial Automation, Energy Saving, Smart Home, etc.

### Key Features

- OPEN WRT, support second development
- 1x WAN, 4x LAN(10/100M), 1x RS232, 1x RS485(Optional)
- 4G/3G/PPPoE/DHCP and Static address connection mode, switchover between wired and wireless connectivity
- Support MQTT protocol(Optional)
- APN/VPDN to ensure the security of data transmission.
- Multiple VPN protocols, IPSec, L2TP, PPTP, GRE and OPEN VPN.
- DHCP server, DHCP binding MAC address, DDNS, Firewall, NAT, DMZ host, QoS, Traffic Analysis, Real-time display of data transfer rate, etc.
- TCP/IP, UDP, FTP, HTTP network protocols.
- SPI Firewall, DoS attack, VPN traversal, Access Control, Port Mapping, DMZ Mapping, Access Control List(ACL), IP-MAC binding and Clone function, etc.
- Heartbeat link detection, offline automatic reconnection.
- Hardware and software auto inspection technology, enable operation fault auto repairing.
- Status query of system, network connection, routing.
- Telnet, web, ssh configurations.
- Web upgrade, local system log, remote log, serial port output log.
- High power and speed WIFI
- GPS(Optional) and Dual SIM(Optional)
- Sending SMS via web UI(Optional)
- Remote configuration and management

### Specifications

#### System

**CPU:** Industrial 32-bit

**FLASH:** 16MB (Extendable to 32MB)

**SDRAM:** 128MB (Extendable to 256MB)

#### Cellular Interface

4G/3G/2G for option (FDD-LTE, TDD-LTE, HSPA/WCDMA, EVDO, TD-SCDMA, EDGE, CDMA 1X and GPRS)

#### Cellular Antenna Interface

**Number of Ports:** 1

**Note:** Standard SMA female antenna interface, characteristic impedance 50Ω

## SIM Interface

**Number of Ports:** 1, or 2(Optional)

**Note:** Standard drawer type card holder, support 1.8V/3V SIM/UM card, built-in 15KV ESD protection

## Ethernet Port (RJ45)

**Number of Ports:** 5, 1x WAN, 4x LAN

**Note:** 10/100M, Auto MDI/MDIX, 1.5KV magnetic isolation protection

## WIFI

**Standard:** IEEE802.11b/g/n for wireless LAN

**Transmission Rates:**

IEEE802.11b/g: Up to 54Mbps, IEEE802.11n: Up to 300Mbps

**Security:** WEP, WPA/WPA2

**TX Transmit Power:** 21.5dBm (11g), 26dBm (11b)

**RX Sensitivity:** <-72dBm@54Mbps

## GPS (Option)

Support from the built-in cellular module, or external GPS module

**Note:** GPS maybe unavailable for some cellular modules, and External GPS module will be more accurate, but with higher price.

## Serial Interface (5-PIN Industrial terminal block)

**Number of interfaces:** 2, 1x RS232, 1x RS485(Optional)

**Note:** Built-in 15KV ESD protection, and TTL GPIOs is customizable

## Serial Communication Parameters

**Baudrate:** 300~230400bits/s

**Data Bit:** 5, 6, 7, 8 bits

**Stop Bit:** 1, 1.5, 2 bits

**Check:** No, Even-parity, Odd Parity, SPACE and MARK

## Power Requirements

**Standard Power:** DC 12V/1.5A

**Power Range:** DC 5~35V

**Note:** Built-in power inverting protection and over voltage protection

## Power Consumption

**Communication:** 121~280mA@12VDC

**Standby:** 115~210mA@12VDC

**Scheduled Shutdown:** 2mA@12VDC

## LED Indicators

LAN, WAN, WIFI, Alarm, Online, System, Signal Strength, Power

## Reliability

EMC up to level 3

Use NTP technology, build-in RTC

SIM/UM card port built-in 15KV ESD protection

## Warranty

**Warranty Period:** 12 months

## Environmental Limits

**Operating Temperature:** -35~+75°C (-31~+167 °F)

**Storage Temperature:** -40~+80°C (-40~+176 °F)

**Ambient Relative Humidity:** 93%±3%, non-condensing

## Physical Characteristics



**Protection Class:** IP30, Housing and system are isolated safely, ideal for industrial automation application

**Housing:** Iron

**Weight:** 790g (1.74lbs)

**Dimension:** 168x104x27mm (6.61x4.09x1.06 inches), Antenna and other accessories not included

## Dimensions

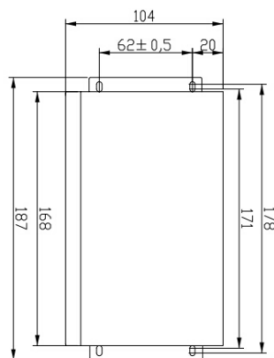

## Order Information

### **Models to choose (Dual SIM and GPS are Optional)**

**TR341-LF**, Industrial LTE/WCDMA WIFI Router

**TR341-W**, Industrial WCDMA WIFI Router

### **Package Content**

- TR341 Router Host
- Power Adapter(DC 12V/1.5A)
- WIFI Antenna(Female SMA)
- Cellular Antenna (Male SMA)
- Console Cable(RS232)
- Ethernet Cable(1 meter)
- 5-Pin Terminal Block

Note: Please visit our website for available frequency band of Bivocom industrial cellular routers, or contact [sales@bivocom.com](mailto:sales@bivocom.com) for more information.